

# **Model DT84X72R**

Dual-Temp Walk-In Cold Storage Pantry with Integrated Reach-In Freezer Column

PROUDLY MANUFACTURED IN THE USA PATENT PENDING

STANDARD FEATURES

UPDATED 12/23

## COOLING INNOVATION With COMFORT

Qflow360™ (patent pending) Air Walls create hyper streams of air that are virtually undetectable on the body, yet distributes cold air rapidly and evenly throughout every cubic inch of interior; for extended preservation of food. Refrigeration temperature adjustable from 34°F to 39°F, freezer temps from -2°F to -15°F.

## REFRIGERATED AIR CURTAIN/AIR DAM

Located above the entry and reach-in door openings and engineered to keep cold air in and warm air out (helps keep bugs out too).

# LUXURY LED LIGHTING

Vibrant interior lighting with scratch-resistant, white translucent, polycarbonate defusing lenses delivering optimal illumination. Customize the overall mood with LED RGB colors, controlled by the Qoldfusion smartphone app.

#### ■ TFT TOUCH PAD & PHONE APP CONTROL

Illuminated TFT color touchscreen with easy UI (user interface) digital control of pantry operation system. The Qoldfusion App allows full operation directly from your mobile device.

## COMMERCIAL INSULATED PANELS

Walls & Ceiling - 4-inch thick walls with polyurethane shot-in-place foam insulation, boasting an industry high R-Value of 48.

#### ■ INSULATED FLOOR

3" thick polyurethane shot-in-place foam insulated with sloped entrance for seamless transition to exterior floor. Non-slip, fungi-resistant, easy-to-clean surface.

#### ENTRANCE DOOR THRESHOLD

Integrated, heated threshold with spillage catch trough.

## SHELVING

Easily-adjustible heavy gauge 304 18-8 food grade stainless steel with slots for optimal air flow.

#### CONDENSATION ELIMINATING TECHNOLOGY

Heating network surrounds doors and viewing windows for condensation mitigation.


## OPEN DOOR ALARM

AUTO DEFROST

## ■ rPOD™ REMOTE REFRIGERATION

84 X 72

Moves refrigeration noise, hum, vibration & heat outside, away from living space. Certified and engineered to operate in extreme high or sub zero temperatures and can be up to 250ft+ away from the pantry. The rPOD  $^{\rm TM}$  can be either wall mounted, placed on a concrete pad or foundation. All refrigerator pantries come with one (1) rPod  $^{\rm TM}$  and Dual-temp comes with two (2).

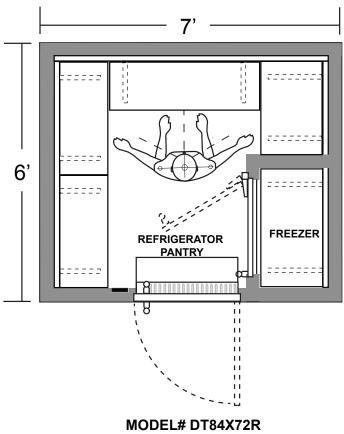

Total Gross cu. ft. 233 Fridge Net Storage: 56 cu. ft. Freezer Net Storage 40 cu. ft.

OPTIONS:		
☐ Viewing Windows ☐ Po	wder-Coated Interior s/s Air Wall Panels	Smart Sleeves™
☐ Concealed Articulating Hinges ☐ Ext	erior Beverage Dispensing Centers	
☐ External Reach-in Doors ☐ Int	ernal Dry Aging Lockers	☐ Q-Note™ Music



MODIFIED CUSTOM (M) NOTE: 35% Premium

ENTRANCE DOOR HINGING (R) (L)

DEPTH (Inches Front to Back)

WIDTH (Inches Left to Right)

CONFIGURATION (All Refrigerator R), (Dual-temp DT) (Dual-temp w/ French Door Freezer DTFD) (All Freezer F)

