

# Model R60X48R

Walk-In Cold Storage Pantry All Refrigerator Pantry

PROUDLY MANUFACTURED IN THE USA PATENT PENDING

# **STANDARD FEATURES**

COOLING INNOVATION With COMFORT Qflow360<sup>™</sup> (patent pending) Air Walls create hyper streams of air that are virtually undetectable on the body, yet distributes cold air rapidly and evenly throughout every cubic inch of interior; for extended preservation of food. Refrigeration temperature adjustable from 34°F to 39° F, freezer temps from -2° F to -15° F.

#### REFRIGERATED AIR CURTAIN/AIR DAM Located above the entry and reach-in door openings and engineered to keep cold air in and warm air out (helps keep bugs out too).

# LUXURY LED LIGHTING

Vibrant interior lighting with scratch-resistant, white translucent, polycarbonate defusing lenses delivering optimal illumination. Customize the overall mood with LED RGB colors, controlled by the Qoldfusion smartphone app

# TFT TOUCH PAD & PHONE APP CONTROL Illuminated TFT color touchscreen with easy UI (user interface) digital control of pantry operation system. The Qoldfusion App allows full operation directly from your mobile device.

# COMMERCIAL INSULATED PANELS

Walls & Ceiling - 4-inch thick walls with polyurethane shot-in-place foam insulatlion, boasting an industry high R-Value of 48

# INSULATED FLOOR

3" thick polyurethane shot-in-place foam insulated with sloped entrance for seamless transition to exterior floor. Non-slip, fungi-resistant, easy-to-clean surface.

### ENTRANCE DOOR THRESHOLD Integrated, heated threshold with spillage catch trough.

### SHELVING

Easily-adjustible heavy gauge 304 18-8 food grade stainless steel with slots for optimal air flow


CONDENSATION ELIMINATING TECHNOLOGY Heating network surrounds doors and viewing windows for condensation mitigation.

## OPEN DOOR ALARM

## AUTO DEFROST


#### rPOD<sup>™</sup> REMOTE REFRIGERATION

Moves refrigeration noise, hum, vibration & heat outside, away from living space. Certified and engineered to operate in extreme high or sub zero temperatures and can be up to 250ft+ away from the pantry. The rPOD™ can be either wall mounted, placed on a concrete pad or foundation All refrigerator pantries come with one (1) rPod<sup>™</sup> and Dual-temp comes with two (2).

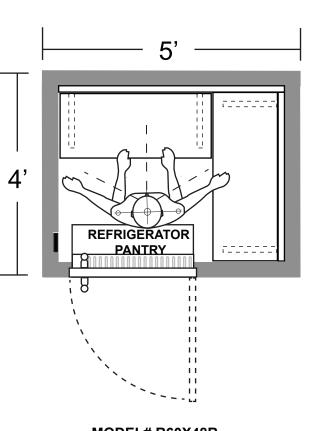

# MODEL# R60X48R

Total Gross 102 cu. ft. Net Storage: 63 cu. ft.

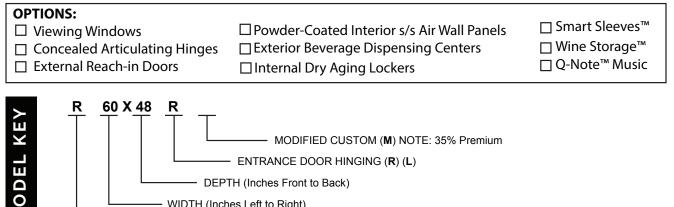

WIDTH (Inches Left to Right)

CONFIGURATION (All Refrigerator R), (Dual-temp DT) (Dual-temp w/ French Door Freezer DTFD) (All Freezer F)

# TO LEARN MORE ABOUT THE

WALK-IN RESIDENTIAL COLD PANTRY,

VISIT QOLDFUSION.COM



UPDATED 12/23