

Model R84X72R

Walk-In Cold Storage Pantry All Refrigerator Pantry

PROUDLY MANUFACTURED IN THE USA PATENT PENDING

STANDARD FEATURES

UPDATED 12/23

■ COOLING INNOVATION With COMFORT

Oflow360™ (patent pending) Air Walls create hyper streams of air that are virtually undetectable on the body, yet distributes cold air rapidly and evenly throughout every cubic inch of interior; for extended preservation of food. Refrigeration temperature adjustable from 34°F to 39°F, freezer temps from -2°F to -15°F.

REFRIGERATED AIR CURTAIN/AIR DAM

Located above the entry and reach-in door openings and engineered to keep cold air in and warm air out (helps keep bugs out too).

LUXURY LED LIGHTING

Vibrant interior lighting with scratch-resistant, white translucent, polycarbonate defusing lenses delivering optimal illumination. Customize the overall mood with LED RGB colors, controlled by the Qoldfusion smartphone app.

■ TFT TOUCH PAD & PHONE APP CONTROL

Illuminated TFT color touchscreen with easy UI (user interface) digital control of pantry operation system. The Qoldfusion App allows full operation directly from your mobile device.

COMMERCIAL INSULATED PANELS

Walls & Ceiling - 4-inch thick walls with polyurethane shot-in-place foam insulation, boasting an industry high R-Value of 48.

INSULATED FLOOR

3" thick polyurethane shot-in-place foam insulated with sloped entrance for seamless transition to exterior floor. Non-slip, fungi-resistant, easy-to-clean surface.

ENTRANCE DOOR THRESHOLD

Integrated, heated threshold with spillage catch trough.

SHELVING

Easily-adjustible heavy gauge 304 18-8 food grade stainless steel with slots for optimal air flow.

CONDENSATION ELIMINATING TECHNOLOGY


Heating network surrounds doors and viewing windows for condensation mitigation.

OPEN DOOR ALARM

AUTO DEFROST

rPOD™ REMOTE REFRIGERATION

Moves refrigeration noise, hum, vibration & heat outside, away from living space. Certified and engineered to operate in extreme high or sub zero temperatures and can be up to 250ft+ away from the pantry. The rPOD $^{\rm TM}$ can be either wall mounted, placed on a concrete pad or foundation. All refrigerator pantries come with one (1) rPod $^{\rm TM}$ and Dual-temp comes with two (2).

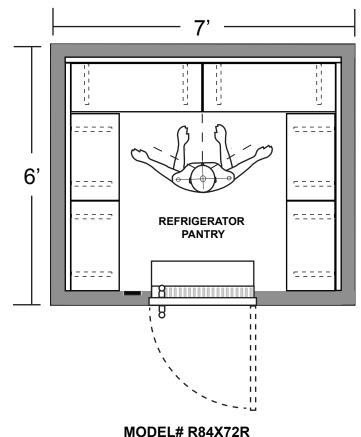

Total Gross 232 cu. ft. Net Storage: 127 cu. ft.

OPTIONS: ☐ Viewing Windows ☐ Concealed Articulating Hinges ☐ External Reach-in Doors ☐ Internal Dry Aging Lockers ☐ Q-Note™ Music ☐ Concealed Articulating Hinges ☐ External Reach-in Doors ☐ Internal Dry Aging Lockers ☐ Q-Note™ Music

MODEL KEY

R 84 X 72 R

MODIFIED CUSTOM (M) NOTE: 35% Premium

ENTRANCE DOOR HINGING (R) (L)

DEPTH (Inches Front to Back)

WIDTH (Inches Left to Right)

CONFIGURATION (All Refrigerator R), (Dual-temp DT) (Dual-temp w/ French Door Freezer DTFD) (All Freezer F)

